


# SURGICRYL<sup>®</sup>

## MONOFAST

### POLYGLYCAPRONE 25



<b>Type</b>	Monofilament
<b>Composition</b>	Polyglycaprone 25, a copolymer made of 75% glycolide and 25% ε-caprolactone
<b>Coating</b>	None
<b>Colour</b>	Violet / Beige - undyed
<b>Tissue reaction</b>	Minimal
<b>Absorption</b>	The hydrolytic action by which the material is broken down results in total absorption in approximately 90 to 110 days. Approximately 75% of tensile strength remain after 7 days.
<b>Presentation</b>	Box with 12 sutures



*For quality  
&  
safety*

The logo for smi, consisting of the lowercase letters "smi" in a bold, blue, sans-serif font with a white outline.

[www.sutures.be](http://www.sutures.be)

# SURGICRYL<sup>®</sup>

## MONOFAST

### POLYGLECAPRONE 25

#### CHARACTERISTICS

- High tensile strength
- Synthetic
- Breaks down by hydrolysis
- Monofilament with microscopic uniform diameter
  
- Pliability and softness
  
- Hermetically sealed packing

#### BENEFITS

- Excellent tissue support
- Minimal tissue reaction
- Predictable absorption rate
- Soft passage through the tissues without sawing, tissue drag and trauma
- Absence of capillarity (no support of bacterial growth)
- Excellent knot tie down
  
- Good handling properties
- Easy and secure knotting
  
- Guaranteed seal and product sterility


**INDICATIONS** Superficial soft tissue and/or ligation  
 especially in General surgery  
 Skin closure  
 Plastic surgery  
 Gastrointestinal surgery  
 Gynaecology  
 Urology

**CONTRAINDICATIONS** Cardiovascular surgery  
 Neurosurgery  
 Ophthalmic surgery


Being absorbable not to use when an extended wound support is required.

Caution in patients with delayed wound healing (e.g. compromised immune system).

#### TENSILE STRENGTH

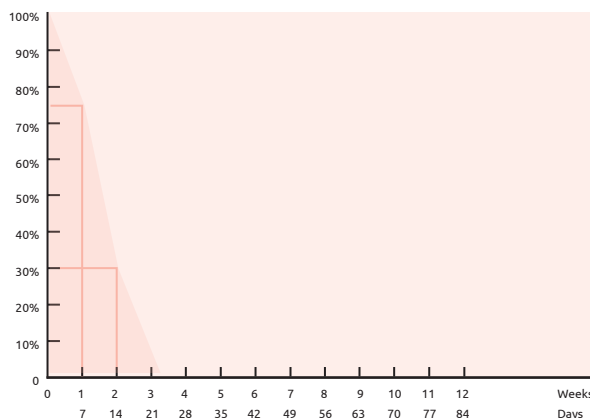

#### ABSORPTION








**Round bodied taper point**

**1/2 circle**










			<b>Metric</b>	<b>USP</b>	<b>Length</b>		<b>Order number</b>	
HR 13 mm		0.7	6/0	45 cm	<i>violet</i>	16070113		
		1	5/0	45 cm	<i>violet</i>	16100113		
		1.5	4/0	75 cm	<i>violet</i>	16150113		
	HR 17 mm		1	5/0	45 cm	<i>violet</i>	16100117	
			1.5	4/0	75 cm	<i>violet</i>	16150117	
			2	3/0	75 cm	<i>violet</i>	16200117	
		HR 22 mm		1.5	4/0	75 cm	<i>violet</i>	16150122
				2	3/0	75 cm	<i>violet</i>	16200122
				3	2/0	75 cm	<i>violet</i>	16300122











**Reverse cutting**

**3/8 circle**



			<b>Metric</b>	<b>USP</b>	<b>Length</b>		<b>Order number</b>
DS 12 mm		0.7	6/0	45 cm	<i>undyed</i>	16071512	
		0.7	6/0	75 cm	<i>undyed</i>	16071512-75	
		0.7	6/0	75 cm	<i>violet</i>	16071512V	
		1	5/0	45 cm	<i>undyed</i>	16101512	
		1	5/0	45 cm	<i>violet</i>	16101512V	
DS 12 mm Easy Pass		0.7	6/0	50 cm	<i>undyed</i>	16071512P	
		1	5/0	50 cm	<i>undyed</i>	16101512P	
		1.5	4/0	50 cm	<i>undyed</i>	16151512P	
DS 16 mm		1	5/0	75 cm	<i>undyed</i>	16101516	
		1	5/0	75 cm	<i>violet</i>	16101516V	
		1.5	4/0	75 cm	<i>undyed</i>	16151516	
		1.5	4/0	75 cm	<i>violet</i>	16151516V	
		2	3/0	75 cm	<i>undyed</i>	16201516	
		2	3/0	75 cm	<i>undyed</i>	16201516	
DS 16 mm Easy Pass		1	5/0	50 cm	<i>undyed</i>	16101516P	
		1.5	4/0	50 cm	<i>undyed</i>	16151516P	
DS 16 mm black		1	5/0	75 cm	<i>violet</i>	16101516VB	
DS 19 mm		1	5/0	45 cm	<i>undyed</i>	16101519	
		1	5/0	75 cm	<i>violet</i>	16101519V	
		1.5	4/0	75 cm	<i>undyed</i>	16151519	
		1.5	4/0	75 cm	<i>violet</i>	16151519V	
		2	3/0	75 cm	<i>undyed</i>	16201519	
		2	3/0	75 cm	<i>violet</i>	16201519V	
		3	2/0	75 cm	<i>undyed</i>	16301519	
DS 19 mm Easy Pass		1.5	4/0	50 cm	<i>undyed</i>	16151519P	
		2	3/0	50 cm	<i>undyed</i>	16201519P	

 Reverse cutting		Metric	USP	Length		Order number
<b>3/8 circle</b> 	DS 19 mm black 	1	5/0	75 cm	<i>violet</i>	16101519VB
		1.5	4/0	75 cm	<i>violet</i>	16151519VB
	DS 24 mm 	2	3/0	75 cm	<i>undyed</i>	16201524
		3	2/0	75 cm	<i>undyed</i>	16301524
	DS 24 mm Easy Pass 	2	3/0	75 cm	<i>undyed</i>	16201524P-75

 Round bodied taper cutting point		Metric	USP	Length		Order number
<b>3/8 circle</b> 	DRT 16 mm 	1	5/0	75 cm	<i>violet</i>	16100416